

3-1 LA25



LA25 is a Small-scale actuator. Its standard Max stroke is 250mm It can be used in the equipment of buildings and rehabilitation, Ex: fire control windows and electric wheelchair etc.

Features:


- 12V /24V DC permanent magnet motor
- Thrust 1000N, Typical Speed 10~25mm/s
- Aluminum Alloy housing protects motor and gear
- Strong wear and corrosion resistant stainless steel inner tube
- Elegant and compact design with small installation dimensions.
- Steel piston rod eye
- Duty Cycle: Max. 10% or 2 min. / 18min. in continuous use; Ambient temperature: +5°C to +40°C
- Protection class: IP56
- Color: Silver Gray
- Cable Length 100cm

LA25 Ordering Example :

LA25 . 1 - 10 - 12

MOTOR VOITAGE	12 : DC 12 V	24 : DC 24 V	
STROKE LENGTH	05: 5cm 20: 20cm	10: 10cm 25: 25cm	15: 15cm
SPINDLI PITCH	1: 1000N / 10mm/s 3: 350N / 24mm/s	2: 750N / 16mm/s	
ACTUATOR TYPE	LA25-BASIC (Min order 100 pcs)		

Dimensions:

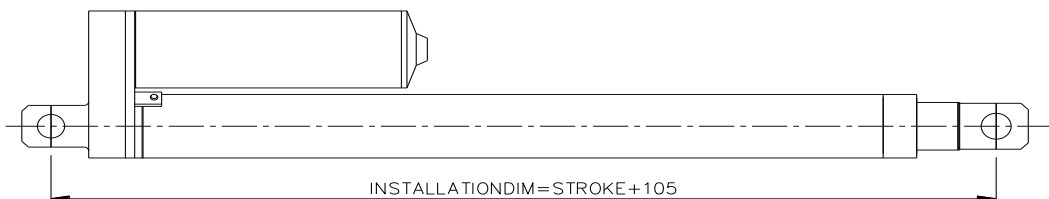

LA25 Installation Dimension :

Actuator Stroke mm	100	150	200	250
Basic Installation Stroke mm	205	255	305	355
Stretch Stroke mm	305	405	505	605