

**5-11 HB9XA**

HB9XA is designed based on ergonomics and synthesizes multiple functions; silicone which has excellent touch is adopted as the material of button, it works with CB20(NEW) and has back function. Its protection class is IP54.

**Features:**

- Specially match for CB20(NEW) control box, operating up to 4 actuators.
- Easily operated by both left and right handers.
- Ergonomic and elegant design.
- Excellent touch and picturesque silicone button.
- Back light function to let the handset can be used in dim environment.
- LED battery indicator; also light switch and nursing call function are available for option.
- Up to 12-easy touch buttons
- The shape is designed to prevent careless pressing button while the button side facing table.
- Easy to disassemble for repair.
- Hook is designed for easy placement.
- Color: Gray-white
- Protection class: IP54

**Option:**

- Color: Black ( Min quantity 500 PCS)
- Customized function (Min quantity: 500 PCS)

**User Guide:**

Please refer to CB20(NEW) User Guide.

**HB9XA Ordering Example:**

**HB9 6A + C 00**

**FRONT COVER**

- 00 : STANDARD HB95A+00 (Back/\*Up and Down/Leg/\* Back and leg simultaneous movement/ Trendelenburg)
- 01 : STANDARD HB96A+C01(BACK/\*Up and Down/Leg/\*Trendelenburg/\* Back and leg simultaneous movement /\* Nursing call/ \*Light)
- \* Actuators for Up and down = Actuators for trendelenburg
- \* Up and down : 2 actuators move the same direction
- \* Trendelenburg : 2actuators move the opposite direction
- \* Back and leg simultaneous movement : 2 actuators move the same direction
- \* Nursing call: If the nursing call is connected with CB20(NEW), Nursing call can be controlled by HB96A.
- \*Light: If the Light light is connected with CB20(NEW), Light can be controlled by HB96A

- ★ Xx: X : Customer code  
x : Customize code

**CABLE**

- ★ L : 40cm coiled + 60cm straight (7 Cores)
- C : 30cm coiled + 1M straight (7 Cores)
- ★ S : 2.5M Straight , without Plug

**COLOR**

- + : Gray-white
- ★ - : Black( Min Quantity : 500 PCS)

**NO. OF CHANNELS**

- 5A: 3 CHANNELS 5 rows functions for CB20(NEW)
- 6A: 4 CHANNELS 6 rows functions for CB20(NEW)


**HANDSET TYPE HB9XA**

The 「★」 signal is for special specification .


**STANDARD FRONT COVER**

**HB95 A**

**HB96A**

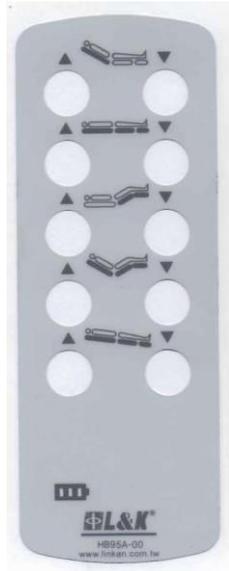

**Dimension:**

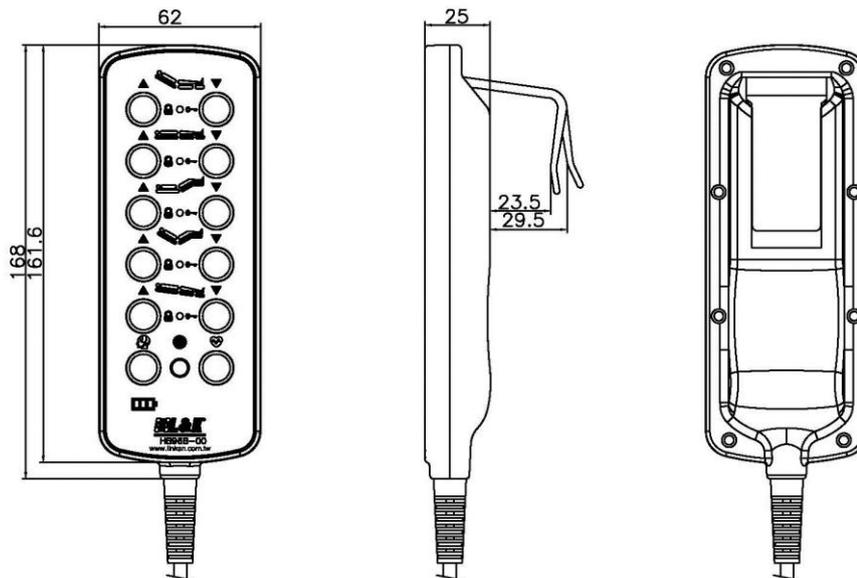

**Notice:**

- ◆ Max.12 press buttons , HB9XA can operate up to 4 actuators.
- ◆ HB9XA can only work with CB20(NEW)

Specifications are subject to change without prior notice. It is the responsibility for the product users to determine the suitability of LINKAN A/C products for a specific application. LINKAN A/C will be responsible for replacing/ repairing defective products covered by the warranty if promptly returned to the factory. We won't undertake any responsibility except repairing.